


- Final Installation Checklist
- ~ Check moving components are not obstructed and move freely.
- ~ Connect water supply.
- ~ Check connections are secure and fixed correctly.
- ~ Check installation for leaks.
- ~ Check water level aligns to that marked within cistern, fine adjust if necessary.
- ~ Hold the valve open (float down) to check overflow operation is sufficient.
- ~ If the valve fails to shut off, the diaphragm & filter may require cleaning.
- ~ Flush the cistern to check outlet valve operation.

COALBROOK

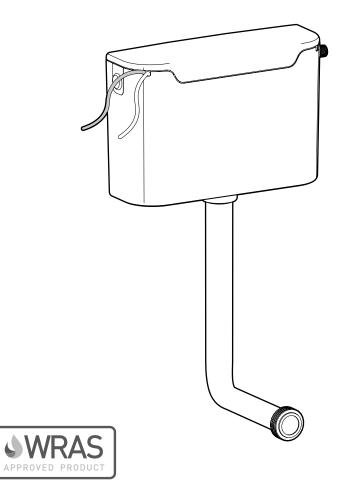

Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited.

The right to modify designs and dimensions is reserved. E & O.E

COALBROOK www.coalbrookuk.co.uk | info@coalbrookuk.co.uk

CONCEALED PNEUMATIC CISTERN

IMPORTANT NOTES

In addition to reference dimensions, allowance must be made for isolation valve, piping and button.

No sealing compound, paste, flux or solvent to be used in contact with plastic or rubber surfaces to avoid damage. Rubber washers will provide adequate seal. PTFE tape may be used on threads. Do not over tighten plastic nuts. No chemical block/ additive to be used in this cistern.

Installation to a masonry substrate shown for visual purposes. This procedure is transferable across other installation applications i.e. furniture. Ensure that suitable fixings are used for the required application.

