



## BASIN MIXER INSTALLATION



- 1. Where required, drill a 34mm diameter hole in the mounting surface.
- 2. The deck plate and washer must be used as part of the installation.

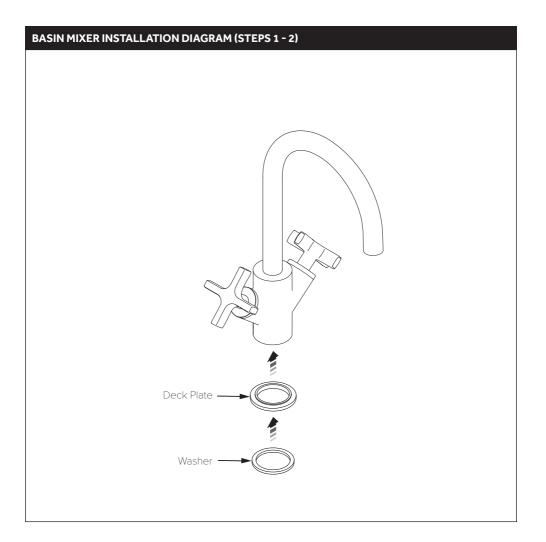


3. Screw the threaded studs into the threaded holes in the underside of the basin mixer.

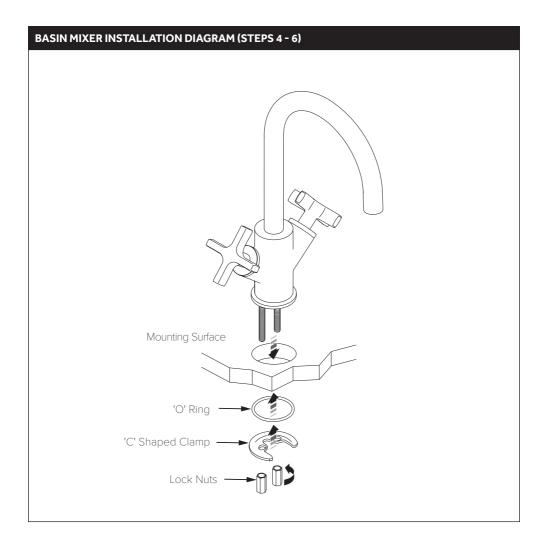

- 4. Locate the basin mixer to the hole in the mounting surface.
- 5. Locate the 'O' ring into the recess on the 'C' shape clamp, then locate the clamp over the two threaded studs.
- 6. Screw the lock nuts onto the threaded studs and align the spout. Tighten the nuts to secure the basin mixer in place. Do not over tighten.




- 7. Assemble the two flexible hoses into the two remaining threaded ports in the underside of the basin mixer.
- 8. Connect hoses to the appropriate hot and cold water supplies. The hot connection must be made to the port on the left hand side of the mixer, and the cold connection to the right hand side.
- 9. Check all connections for leaks before concealing pipework and finishing installation.

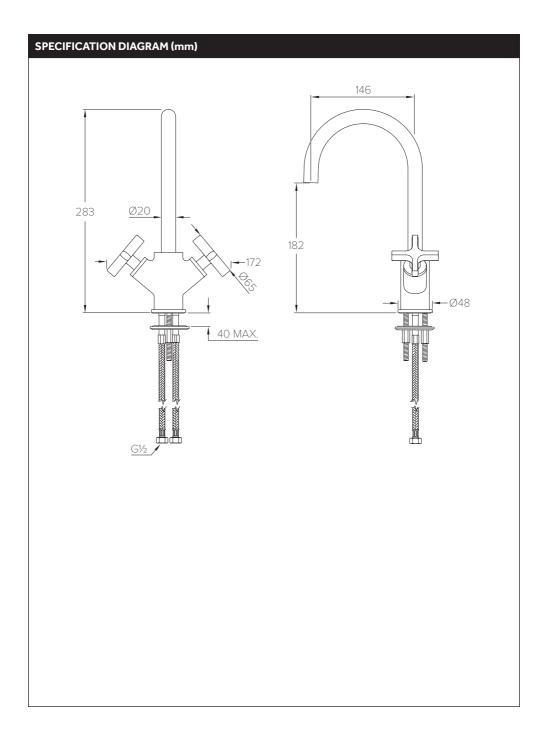

## TYPICAL FLOW RATES

Flow rates shown are free-flowing and may vary subject to restrictions created by installation, pipework layout or application

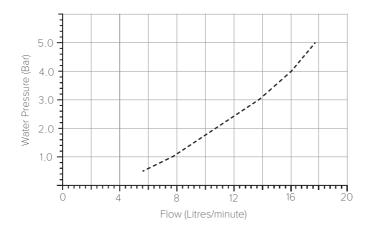

Water Pressure (Bar)	Outlet (Litres/minute)
0.5	5.6
1.0	7.7
2.0	11.0
3.0	13.7
4.0	16.0
5.0	17.9



Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited.

The right to modify designs and dimensions is reserved. E & O.E.

V1.0324

## COALBROOK