




COALBROOK

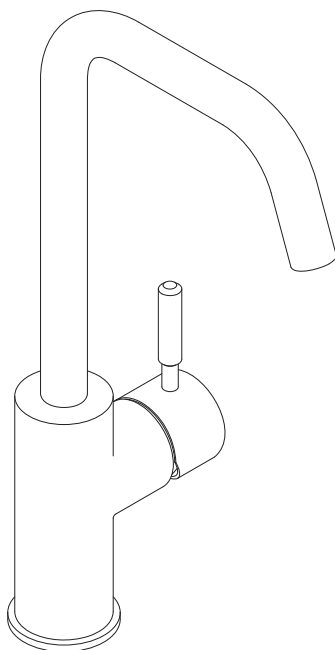

**DECK MOUNTED KITCHEN MIXER
WITH SWIVEL SPOUT INSTALLATION**

Professional installation

We recommend that our products are fitted by a fully qualified professional plumber. They should be installed correctly and in accordance with all local water regulations. Where required the system shall be protected by non-return valves (not supplied). All products should be accessible for routine servicing.

Suits all systems

This Coalbrook product is potentially suitable for every possible application, type of boiler and water supply pressure. However, if your supply pressure is below 1 bar it is advisable to fit a water pump. For systems with combination boilers, it is not advisable to fit pumps (refer to boiler manufacturer).

Supply temperature safety notice

A thermostatic mixing valve (TMV) should be fitted (not supplied) to the hot supply to restrict the temperature to a safe working/maximum temperature to comply with local building regulations, current legislation, relevant standards and codes of practice. Maximum allowed temperatures vary subject to type of installation or specification of building.

Flushing system

It is most important to flush out all pipework thoroughly before connecting the mixer. Failure to do so is the single most common cause of cartridge failure and water restriction.

Supply connections

The hot water supply must be connected to the front hose, and cold water to the rear hose, as viewed from the front.


Balancing flow

If a significant pressure difference exists between the hot and cold supplies, we advise fitting a 'flow regulator' (not supplied) to the higher or both supplies.

Water quality

In hard water areas, a suitable water treatment system should be provided to prevent limescale deposits (calcium deposits) which may effect the long term performance of the mixer cartridge. Exterior surfaces should be gently wiped with a dry soft cloth after use to minimise water stains and limescale deposits.


KITCHEN MIXER INSTALLATION (STEPS 1 - 3)

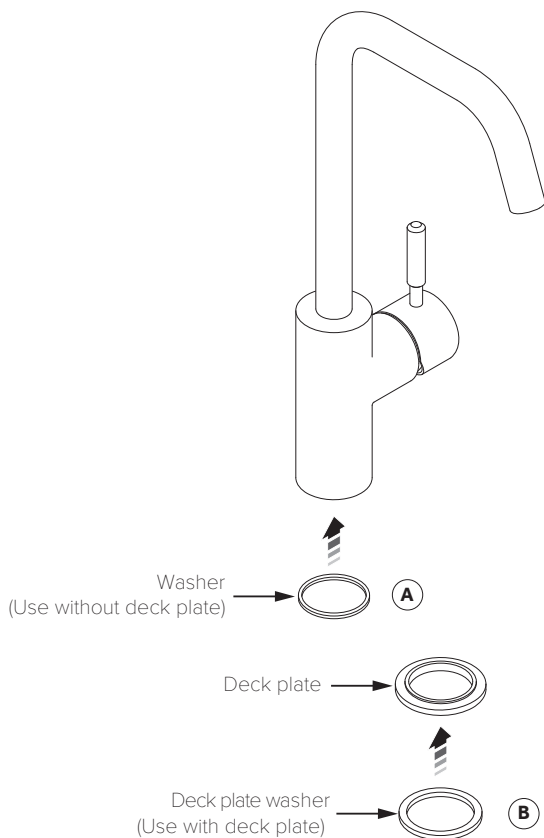


1. Where required, drill a Ø33mm hole in the mounting surface.
2. If the hole has been drilled purposefully for this product, the mixer can be installed with or without the deck plate. Use washer (A) if installing without the deck plate.
3. If the mixer is being installed into a ceramic basin with a pre-existing hole, the deck plate must be used as part of the installation. Use washer (B) if installing with the deck plate.

COALBROOK


www.coalbrookuk.co.uk | info@coalbrookuk.co.uk

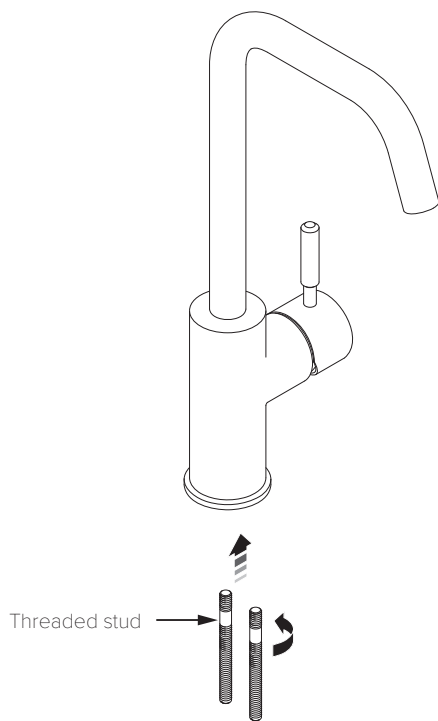

4. Screw the threaded studs into the threaded holes in the underside of the mixer.

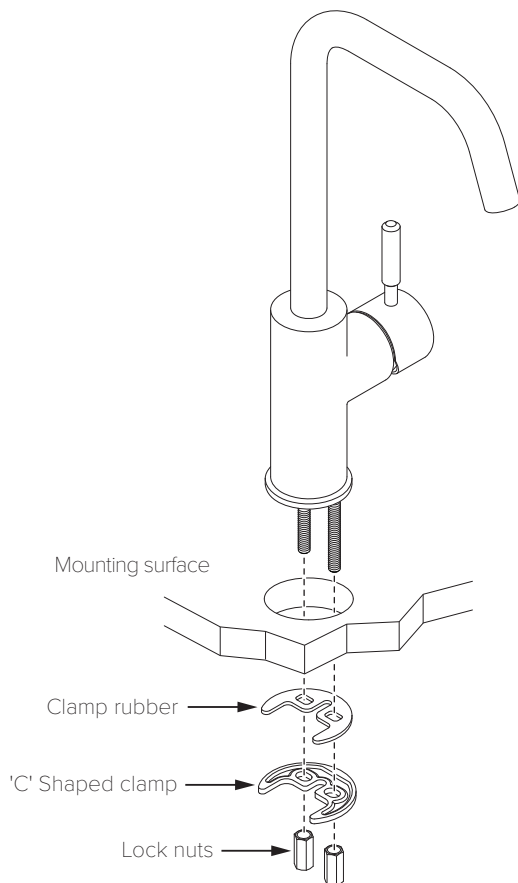


5. Locate the mixer to the hole in the mounting surface.
6. Locate the clamp rubber over the two threaded studs, followed by the 'C' shape clamp.
7. Screw the lock nuts onto the threaded studs and align the mixer. Tighten the nuts to secure the mixer in place. Do not over tighten.

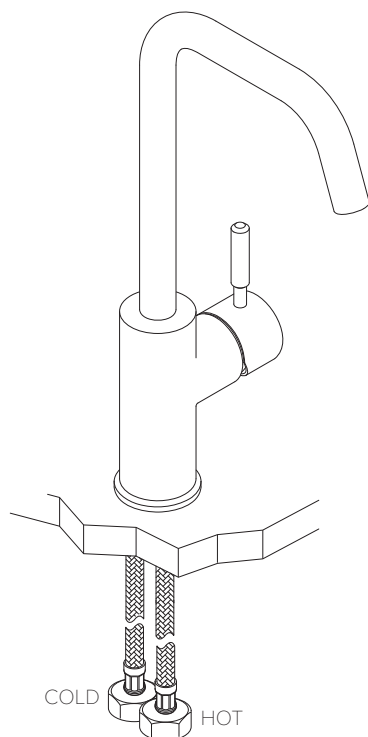

8. Assemble the two flexible hoses into the two remaining threaded ports in the underside of the mixer. The hot connection must be made to the port closest to the front of the mixer, and the cold connection to the rear.
9. Connect hoses to the appropriate hot and cold water supplies. Check all connections for leaks before concealing pipework and finishing installation.

SPECIFICATION DIAGRAM (mm)

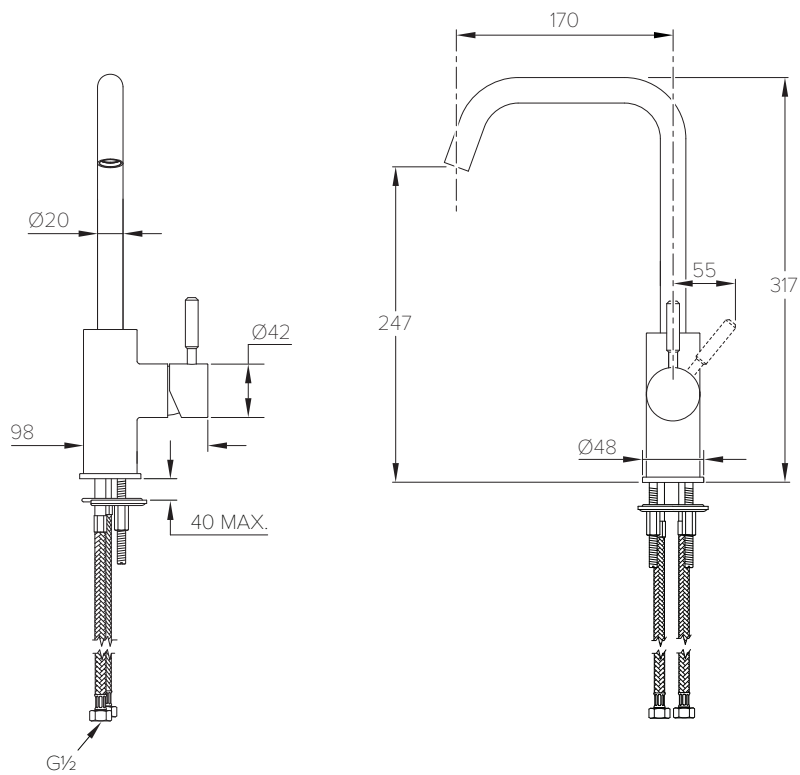


COALBROOK

www.coalbrookuk.co.uk | info@coalbrookuk.co.uk

TYPICAL FLOW RATES

Flow rates shown are free-flowing and may vary subject to restrictions created by installation, pipework layout or application.

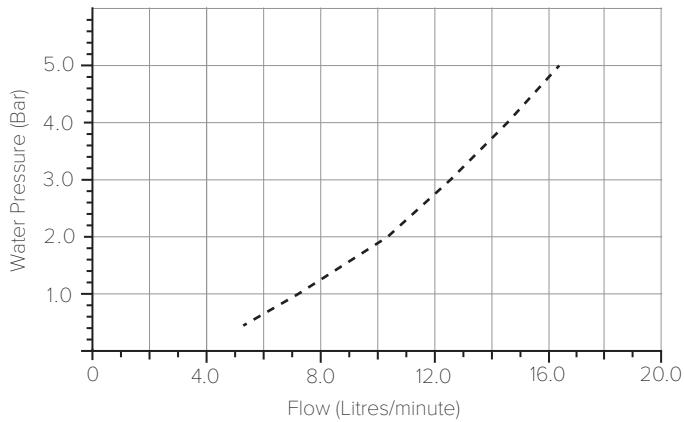

Water Pressure (Bar)	Outlet (Litres/minute)
0.5	5.2
1.0	7.3
2.0	10.3
3.0	12.7
4.0	14.6
5.0	16.5



COALBROOK

Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited.

The right to modify designs and dimensions is reserved. E & O.E.

V2.0625

COALBROOK

www.coalbrookuk.co.uk | info@coalbrookuk.co.uk