


# BA 3002 CONCEALED 2 WAY DIVERTER THERMOSTATIC SHOWER VALVE

## FLOW RATES

---

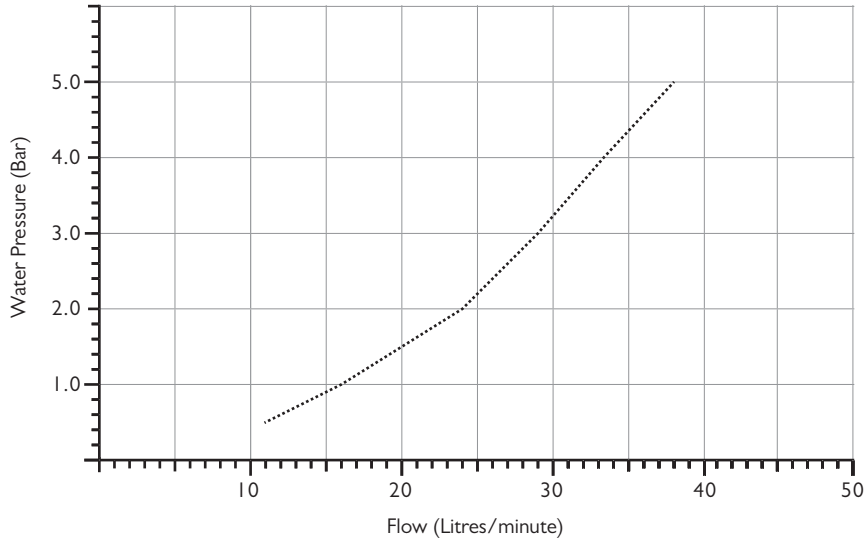

## TYPICAL FLOW RATES

Flow rates shown are free flowing and may vary subject to restrictions created by installation, pipework layout or application.

Water Pressure (Bar)	Outlet (Litres/minute)
0.5	10.7
1.0	16.0
2.0	23.9
3.0	29.0
4.0	33.2
5.0	38.0



COALBROOK