



## **WASTE INSTALLATION**

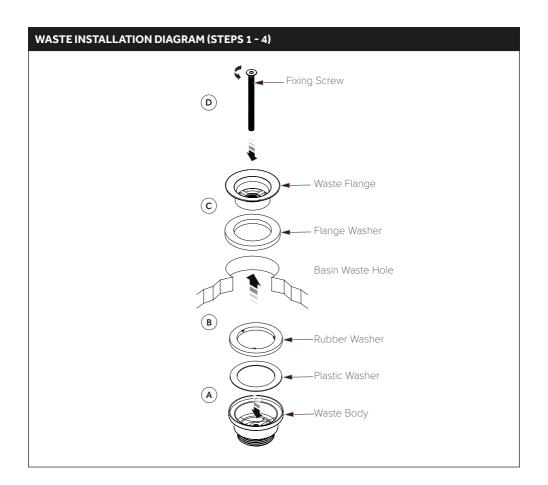

## WASTE INSTALLATION INSTRUCTIONS (STEPS 1 - 4)

- Locate the rubber and plastic washer into the recess on the top face of the waste body (A).
  Ensure that the rubber washer is in contact with the mounting surface.
- 2. The hole in the basin needs to be between Ø43 Ø48. From below push the waste assembly up under the hole in the basin, and hold in place (B).
- 3. Slide the flange washer over the tail of the waste flange and locate the assembly into the waste hole (C).
- 4. Fix the waste assembly in place using the fixing screw provided (D).

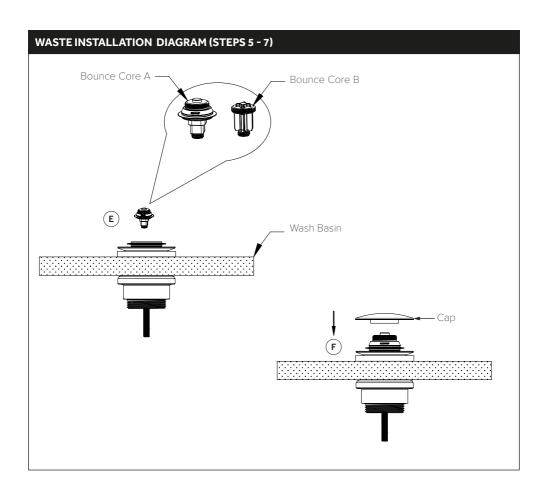

## **WASTE INSTALLATION INSTRUCTIONS (STEPS 5 - 7)**

- 5. There are two bounce cores supplied with the basin waste: bounce core 'A' is for 'click-clack' wastes and bounce core 'B' is for an always open waste. Install the required bounce core into the waste flange (E).
- 6. Screw the cap onto the bounce core (F).
- 7. Make the waste connection using the bottle trap or sewage pipe. Check for leaks before concealing pipework.



Whilst every effort is made to ensure the accuracy of these, they are subject to change without notice as part of the company's product development process. The use of trademarks, product design and artwork is subject to licence or agreement. The design registrations, trademark registrations and copyrights are protected by law and the use or reproduction outside the terms of an agreement is prohibited.

The right to modify designs and dimensions is reserved. E & O.E.

## COALBROOK